Basecoat Converters

Depend on Matthews to deliver them.

Matthews Basecoat Converter is now available in Low VOC!

Constantly being challenged to maximize your capital?
Then let Matthews save you valuable time and money! Matthews Basecoat Converter enables you to paint a multicolor sign in hours rather than days! All you need is one gallon of Matthews Basecoat Converter and a Matthews Clear and you are good to go!

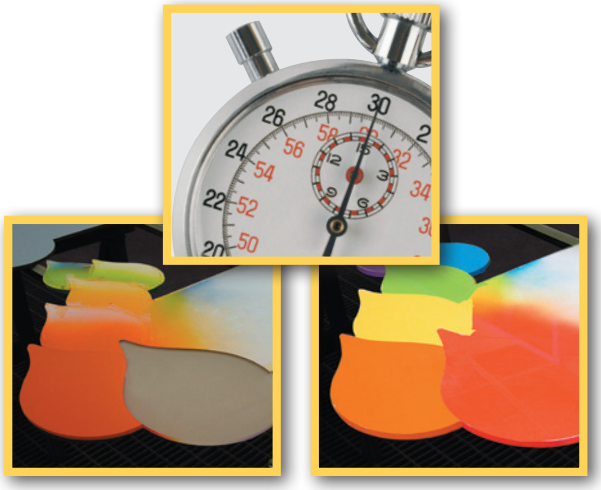

Features

Basecoat Converter enables Matthews Conventional satin, gloss and SVOC 2K products to be converted into a basecoat/clearcoat system, minimizing your need for an additional bank of toners. (This product cannot be used with the MAP-LV product line.)

- ***Now Available in Low VOC!***
- Faster tape and vinyl application times
- Basecoat Converter can be used with solid colors and metallic products
- No need for multiple mixing sticks or complicated mix instructions
- Use existing Matthews toners with one additive
- Simple & easy mix ratio
- Can be used to cover your large surface applications with less difficulty
- Basecoat Converted Matthews top coats can be applied over any Matthews primer
- Allows your painters to apply a more consistent finish
- Exhibits highest possible gloss and distinctness of image (DOI), making your work shine

Note: Matthews Basecoat Converters must be top coated with any MPC Clear.

Benefits

You're in Control…

- Matthews Basecoat Converters improve metallic control—less mottling and streaking—along with ease of application.

Your Time Is Money…

- Matthews Basecoat Converters allow for multiple color applications and faster tape times (see chart on back).

MATTHEWS PAINT

760 Pittsburgh Drive • Delaware, OH 43015
1.800.323.6593 • Fax: 1.800.947.0377 • Visit our website at: www.MatthewsPaint.com

Matthews Paint is a trademark of PPG Ohio, Inc.

DRY TIMES CHART

Low VOC Basecoat Converter

287102SP – MAP Low VOC Basecoat Converter
287103SP – MAP Low VOC Slow Basecoat Converter (Hot/Humid Conditions)

Reduce Dry Times Between Coats	287102SP w/o Accelerator	287102SP w/Accelerator	287103SP Slow Converter w/o Accelerator	287103SP Slow Converter w/Accelerator
• Dust Free	5-10 min.	5-10 min.	5-15 min.	5-10 min.
• To Handle	5-15 min.	5-15 min.	5-20 min.	5-15 min.
Faster Tape Times	20-40 min.	10-30 min.	20-40 min.	10-30 min.
To Clear Coat	15-45 min.*	15-45 min.*	15-45 min.*	15-45 min.*

* If waiting up to 12 hours or more to clearcoat—surface must be lightly scuffed and then cleaned before clear coat application.

MATTHEWS PAINT

