CopperheadRival

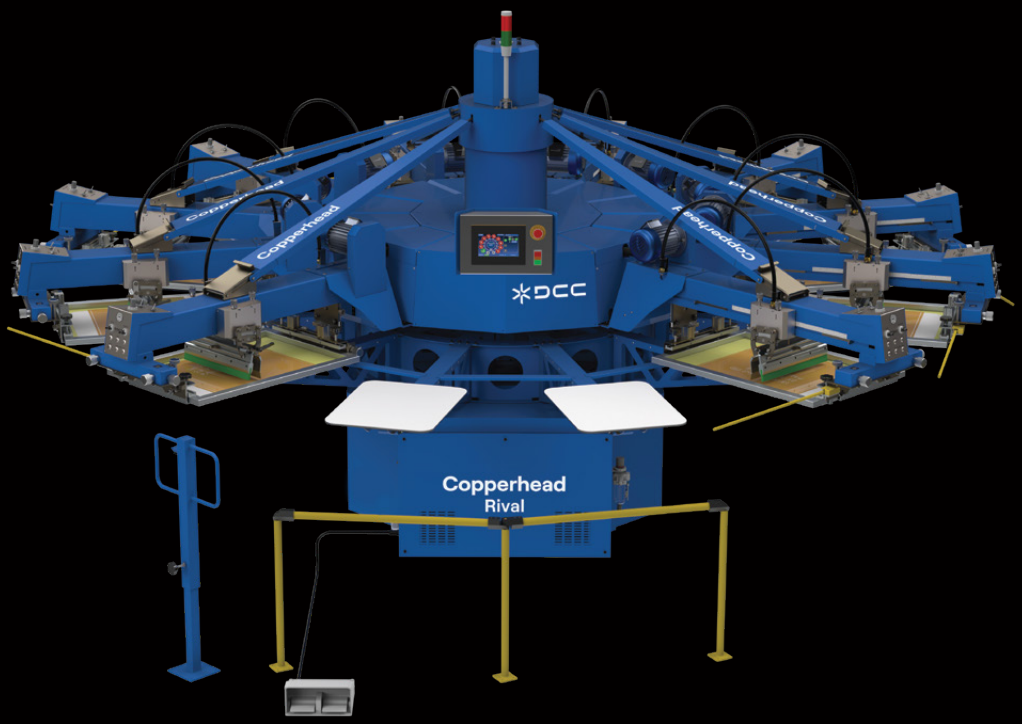

A rugged mid-range press built for fast changeovers and nonstop production.

Built for continuous production, the Copperhead Rival delivers speed, consistency, and stability on every run. It's the dependable choice for mid- to large-scale operations that demand both performance and value.

With its servo-driven index, independent head control, and tool- free adjustments, the Rival combines industrial-grade reliability with smooth operation & ergonomic design-keeping productivity high and maintenance low.

- → **Servo-driven index for quiet, precise motion**
- → **Independent head control for maximum flexibility**
- → **Tool-free squeegee and flood adjustments**
- → **Quick setup modes for fast job changeovers**

Print Size
↔ 41 cm (16 inches)
↕ 51 cm (20 inches)

Standard Pallet Size
↔ 41 cm (16 inches)
↕ 64 cm (25 inches)

Screen Size
↔ 58 cm (23 inches)
↕ 84 cm (33 inches)

Max Printing Speed
Up to 1160 Pieces/hr*

CopperheadRival

- **Smooth Print Strokes**
- **Quiet Operation**
- **Tool-Free Adjustments**

The Squeegee Pressure Equalizer System

Copperhead Rival features a squeegee pressure equalizer system with individual regulators on each head ensures uniform ink deposit for excellent print quality.

With 8, 10, 12 & 14 station configurations, there is sure to be a Copperhead Rival that meets your needs.

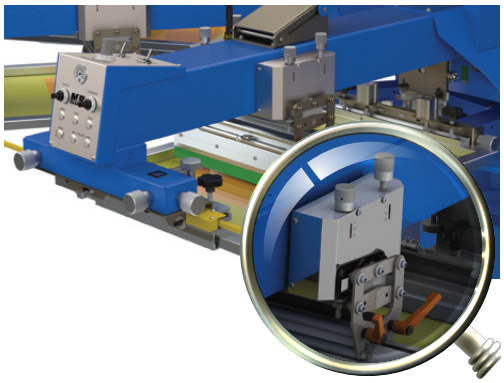

Individual mechanical heads lift for quick screen cleaning

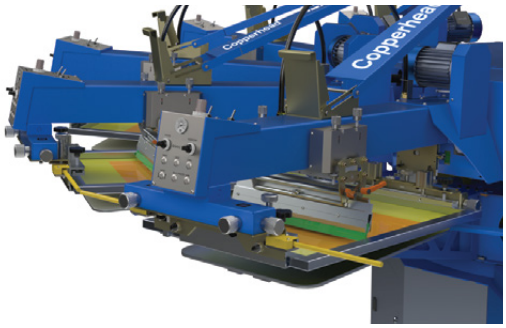

Tech Specifications	Rival 8/6	Rival 10/8	Rival 12/10	Rival 14/12
Air @ 7 Bar (102 psi)[1]	305 L/min (10.8 cfm)	345 L/min (12.2 cfm)	485 L/min (17.1 cfm)	396 L/min (14.0 cfm)
Electrical Requirements[2]	208-230 V, 1 ph, 18A, 50/60 Hz, 3.25 kW (UL/CE) 208-230 V, 3 ph, 10.5A, 50/60 Hz, 3.25 kW (UL) 380-415 V, 3 ph, 7A, 50 Hz, 3.25 kW (CE)	208-230 V, 1 ph, 22A, 50/60 Hz, 4 kW (UL/CE) 208-230 V, 3 ph, 15A, 50/60 Hz, 4 kW (UL) 380-415 V, 3 ph, 10A, 50 Hz, 4 kW (CE)	208-230 V, 1 ph, 26A, 50/60 Hz, 4.75 kW (UL/CE) 208-230 V, 3 ph,15A, 50/60 Hz, 4.75 kW (UL) 380-415 V, 3 ph, 10A, 50 Hz, 4.75 kW(CE)	208-230 V, 1 ph, 30A, 50/60 Hz, 5.5 kW (UL/CE) 208-230 V, 3 ph,17.5A, 50/60 Hz, 5.5 kW (UL) 380-415 V, 3 ph, 14A, 50 Hz, 5.5 kW (CE)
Diameter	391 cm (154")	416 cm (164")	448 cm (176")	472 cm (185")
Maximum Frame Size	58 x 84 cm (23" x 33")	58 x 84 cm (23" x 33")	58 x 84 cm (23" x 33")	58 x 84 cm (23" x 33")
Standard Image Area	41 x 51 cm (16" x 20")	41 x 51 cm (16" x 20")	41 x 51 cm (16" x 20")	41 x 51 cm (16" x 20")
Maximum Rated Image Area	46 x 51 cm (18" x 20")	46 x 51 cm (18" x 20")	46 x 51 cm (18" x 20")	46 x 51 cm (18" x 20")
Machine Weight	1257 kg (2771 lb)	1592 kg (3510 lb)	1822 kg (4017 lb)	2350 kg (5181 lb)
Standard Pallet Size	41 x 64 cm (16" x 25")	41 x 64 cm (16" x 25")	41 x 64 cm (16" x 25")	41 x 64 cm (16" x 25")
Stations/Colors	8/6	10/8	12/10	14/12

[1] Consumption @ 15 pieces/min; 7 bar input pressure & max image area
[2] Use uninterruptible power supply (UPS) to safeguard machine from voltage fluctuation out of main supply.
If incoming voltage differs from the voltage(s) listed in the brochure, calculate amperage accordingly.
Contact DCC/ your nearest dealer for total amperage in case of using built-in flash sockets.

groupdcc.com
Copyright © 2026 DCC Group.
All rights reserved. 11022026

Scan for more offerings from DCC

HQ: DCC Print Vision LLP, 802, Kamla Executive Park, Andheri (East), Mumbai - 400059. MH, India.
DCC Group USA, INC.: 329 Monroe Rd., Sanford, FL 32771, USA
India +91 9930 200 400 | USA +1 (630) 390-4963 marketing@groupdcc.com groupdcc.com
Our Footprints: USA | Mumbai | Tiruppur | Bangladesh | Ludhiana | Kolkata | Bengaluru | Delhi | Surat