HanleyLED

STELLAR EDGE MINI 12 VDC

12V Edge illumination for light boxes

Stellar Series

Specifications

SKU HLED-S1270

Ideal depth ..... For cabinets 3-6"

Beam angle ..... 11° x 77° directional beam

Power (W) ..... 2.7 W/mod (4.12 W/ft)

Efficacy ..... 100 lm/W

Lumens ..... 270 lm/mod (412 lm/ft)

Color temperature (CCT) ..... 6500 K

Modules/ft ..... 1.52/ft (fully-stretched)

Environment IP67

Operating temp. ..... -40° C to +60° C

Storage temp. ..... -40° C to +70° C

Cascade ..... 20 mods single-ended power feed
40 mods double-ended power feed

Packaging ..... Antistatic bag, 20 modules (13 ft/bag)

Warranty ..... 10-Year Product/5-Year Limited Labor

E350828 E487794 RoHS Compliant

Outdoor or indoor signs, new construction or retrofit

Edge light boxes 1-4 ft across!




Constant Current

Max Perimeter Row Distance

Ideal large cabinet use:

- Recommended depth range 3-6"
- Recommended distance across 12-48"


Depth	Cabinet height (max)	Module-to-module (Max.)
3-5"	50"	6"
6"	60"	
7"	84"	

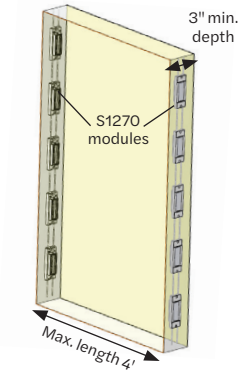


Power Supply Options

Product	35 W, 12V	60 W, 12V	96 W, 12V	100 W, 12V	150 W, 12V	240 W, 12V	288 W, 12V
Stellar Edge Mini	12 mods	22 mods	36 mods	44 mods	54 mods	66 mods	88 mods

Dimensions

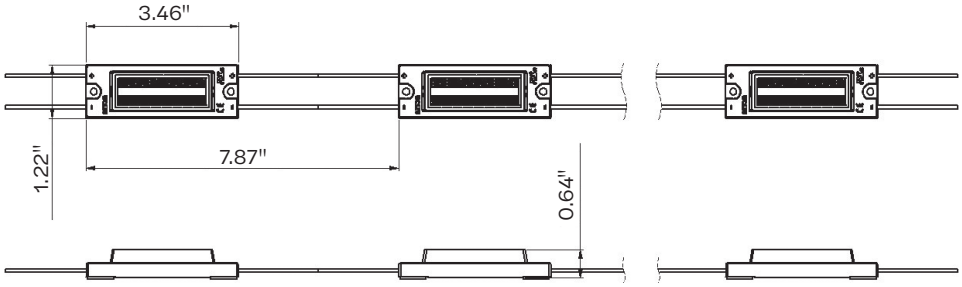

Light Distribution

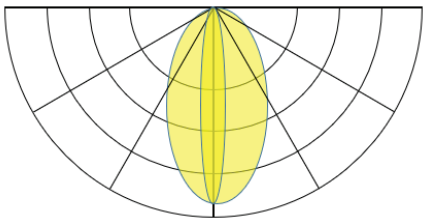

10|5 YEAR WARRANTY
10-Year Product | 5-Year Labor

principalsloan.com
325.227.4577
3490 Venture Dr., San Angelo, TX 76905

PRINCIPAL SLOAN
A Principal Industries Company

© 2025 Principal Industries Rev A 2025-01-16

Specifications subject to change without notice.