STREAMLINER G2

LED lighting solution for retrofit light box applications

Streamliner

Specifications

Dimensions L × W × H ..... See table × 0.73" × 1.01"

Beam angle ..... 170°

Color temperature ..... 7000 K

Efficacy ..... 130 lm/W

Socket type R17d

Max. current loading for 18 AWG cable ..... 5 A

Mounting options ..... Socket (retro)

IP rating IP65

Input voltage ..... 100~277 VAC

Packaging ..... 6 tubes per case

Warranty ..... 7-Year Product / 5-Year Limited Labor*

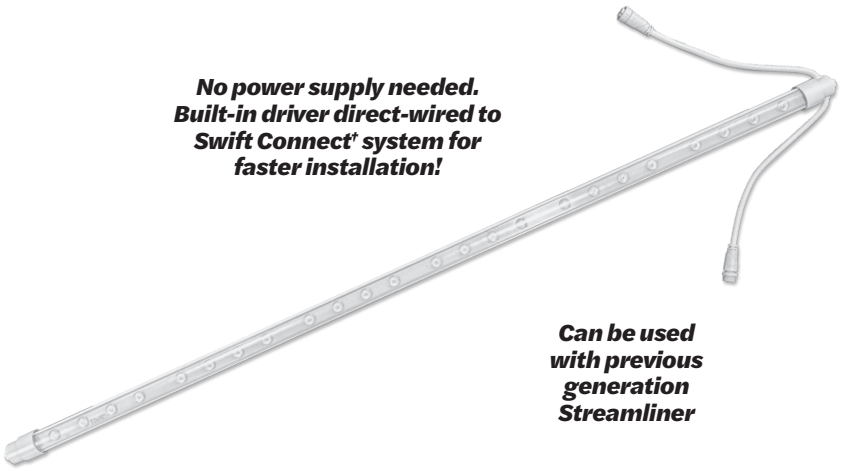

No power supply needed. Built-in driver direct-wired to Swift Connect† system for faster installation!

Can be used with previous generation Streamliner

Product Options

Nominal length	True length	SKU	Lumens per Stik	LED lamp cross reference	Power	Max input (Amps)	Max. cascade (pcs)
24"	21.0"	M-SLE024-AC-70	1300	F24HO	10	0.10	55
30"	27.0"	M-SLE030-AC-70	1950	F30HO	13	0.12	46
36"	33.1"	M-SLE036-AC-70	2100	F36HO	16	0.14	37
42"	39.1"	M-SLE042-AC-70	2375	F42HO	18	0.16	33
48"	45.0"	M-SLE048-AC-70	2750	F48HO	21	0.18	28
60"	57.0"	M-SLE060-AC-70	3400	F60HO	26	0.22	23
64"	61.1"	M-SLE064-AC-70	3700	F64HO	28	0.24	21
72"	69.0"	M-SLE072-AC-70	4080	F72HO	31	0.26	19
84"	81.0"	M-SLE084-AC-70	4800	F84HO	37	0.32	16
96"	93.0"	M-SLE096-AC-70	5500	F96HO	42	0.36	14
108"	105.0"	M-SLE108-AC-70	6150	F108HO	47	0.40	12
117"	114.0"	M-SLE117-AC-70	6500	F117HO	50	0.42	12
120"	117.0"	M-SLE120-AC-70	6800	F120HO	52	.44	11

Layout Guidelines

Double-sided light box depth	Max. space between tubes
6"	6"
8"	12"
12"	12"
16"	16"

Notes: Lightbox size: 79" x 59".
Tested with 3/16" 7328 white acrylic.

* Warranty period is only for products which are used inside of waterproof light box and valid only when used as a system with surge protectors.

E476250 E487794 RoHS Compliant

Dimensions

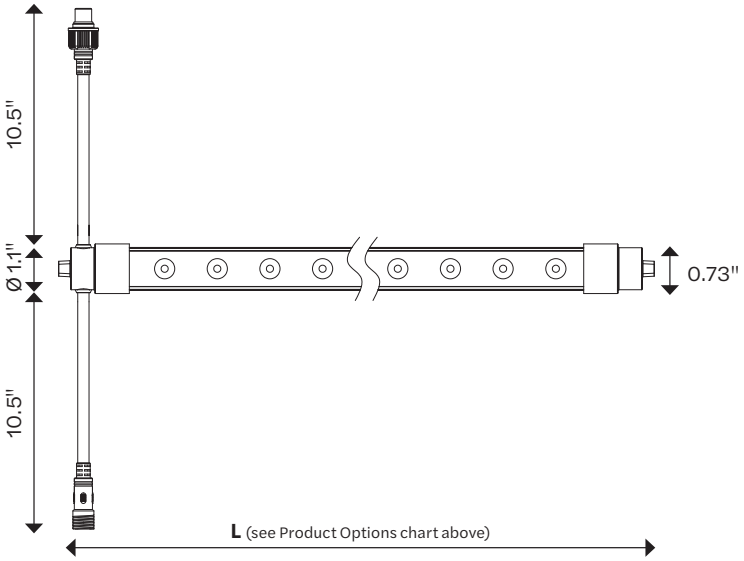

Specifications subject to change without notice.

PRINCIPAL SLOAN
A Principal Industries Company

STREAMLINER G2

LED lighting solution for retrofit light box applications

Streamliner

Accessories



HPEB-SL-CABLE†
Connector cable



A-SLE-MS-WIRE
Cable mounts and cable



A-SLE-MS-CLIP
Mounting clip

HPEB-SP10KV
Surge protector



Maximum number of sticks on a surge protector is equal to the maximum number of sticks in series.

HPEB-SL-BRACKET
Brackets



† All Stiks with SwiftConnect must use NRG Streamliner Connector Cable to make AC connections (sold separately).

Discontinued Part Numbers

Nominal length	SKU
30"	HPEB-SL2S30
36"	HPEB-SL2S36
42"	HPEB-SL2S42
48"	HPEB-SL2S48
60"	HPEB-SL2S60
64"	HPEB-SL2S64
72"	HPEB-SL2S72
84"	HPEB-SL2S84
96"	HPEB-SL2S96
108"	HPEB-SL2S108
117"	HPEB-SL2S117
120"	HPEB-SL2S120

NOTE: Discontinued versions of Streamliner listed here are presented for reference only and are no longer available for order.

principalsloan.com
325.227.4577
3490 Venture Dr., San Angelo, TX 76905

7|5 YEAR
7-Year Product | 5-Year Labor
WARRANTY

PRINCIPAL SLOAN
A Principal Industries Company

© 2026 Principal Industries Rev A 2026-06-15

Specifications subject to change without notice.