HanleyLED

WINGSPAN SINGLE-SIDED 24 VDC

Extreme brightness solution for illuminating custom-built single-sided cabinets and pylon signs

Wingspan Series

Specifications

SKU HLED-WS3360W24

Beam angle ..... 175°

Power (W) ..... 3 W/mod (customizable W/ft)

Color temperature ..... 7000 K

Efficacy ..... 165 lm/W

Lumens ..... 495 lm/mod (customizable lm/ft)

Modules/ft ..... 0.6/ft fully-stretched
(customizable up to 1 mod every 2 ft)

Environment IP67

Operating temp. ..... -25° C to +60° C

Storage temp. ..... -40° C to +70° C

Cascade ..... 20 mods single-ended power feed
40 mods double-ended power feed

Packaging ..... Anti-static bag, 20 modules (33.3 ft)/bag

Warranty ..... 10-Year Product/5-Year Limited Labor

E350828 262904 RoHS Compliant



Ideal for single-sided cabinets and pylon signs

Spacing Chart

Depth	MAX row spacing
5"	13"
6"	18"
7"	22"
8"	24"
9"	28"
10-15"	30"

Power Supply Options

Product	35 W, 24V	60 W, 24V	96 W, 24V	100 W, 24V	150 W, 24V	192 W, 24V	240 W, 24V	288 W, 24V
Wingspan Single-sided	11 mods	20 mods	32 mods	33 mods	50 mods	64 mods	80 mods	96 mods

Dimensions

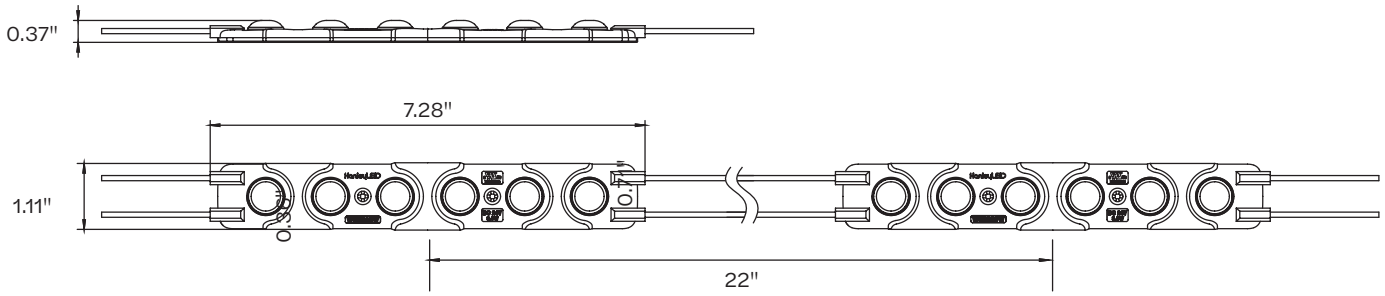

Light Distribution

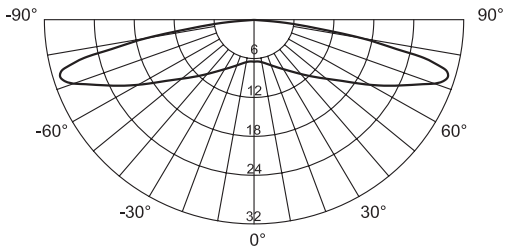

10|5 YEAR 10-Year Product | 5-Year Labor WARRANTY

principalsloan.com
325.227.4577
3490 Venture Dr., San Angelo, TX 76905

© 2025 Principal Industries Rev A 2025-01-16 Specifications subject to change without notice.

PRINCIPAL SLOAN
A Principal Industries Company